


D.C. RELEASE	DESCRIPTION	DATE	BY	SCALE: ??/??" = 1'-0"	USED ON:	FLEETWOOD RECREATIONAL VEHICLE GROUP	PAGE NO. 703-09-90965
				DRAWN: Mark P. DATE: 05/05/10			SHEET 1 OF 1
				VERSION: Prod A WIP 2 / Prod A WIP 2		TITLE: TANK FLUSH SYSTEM INFO	
12-00		01/22/11	CSG	PLOT: 01/22/11 13:22:48 Batch Rename	AUX. INFO.		

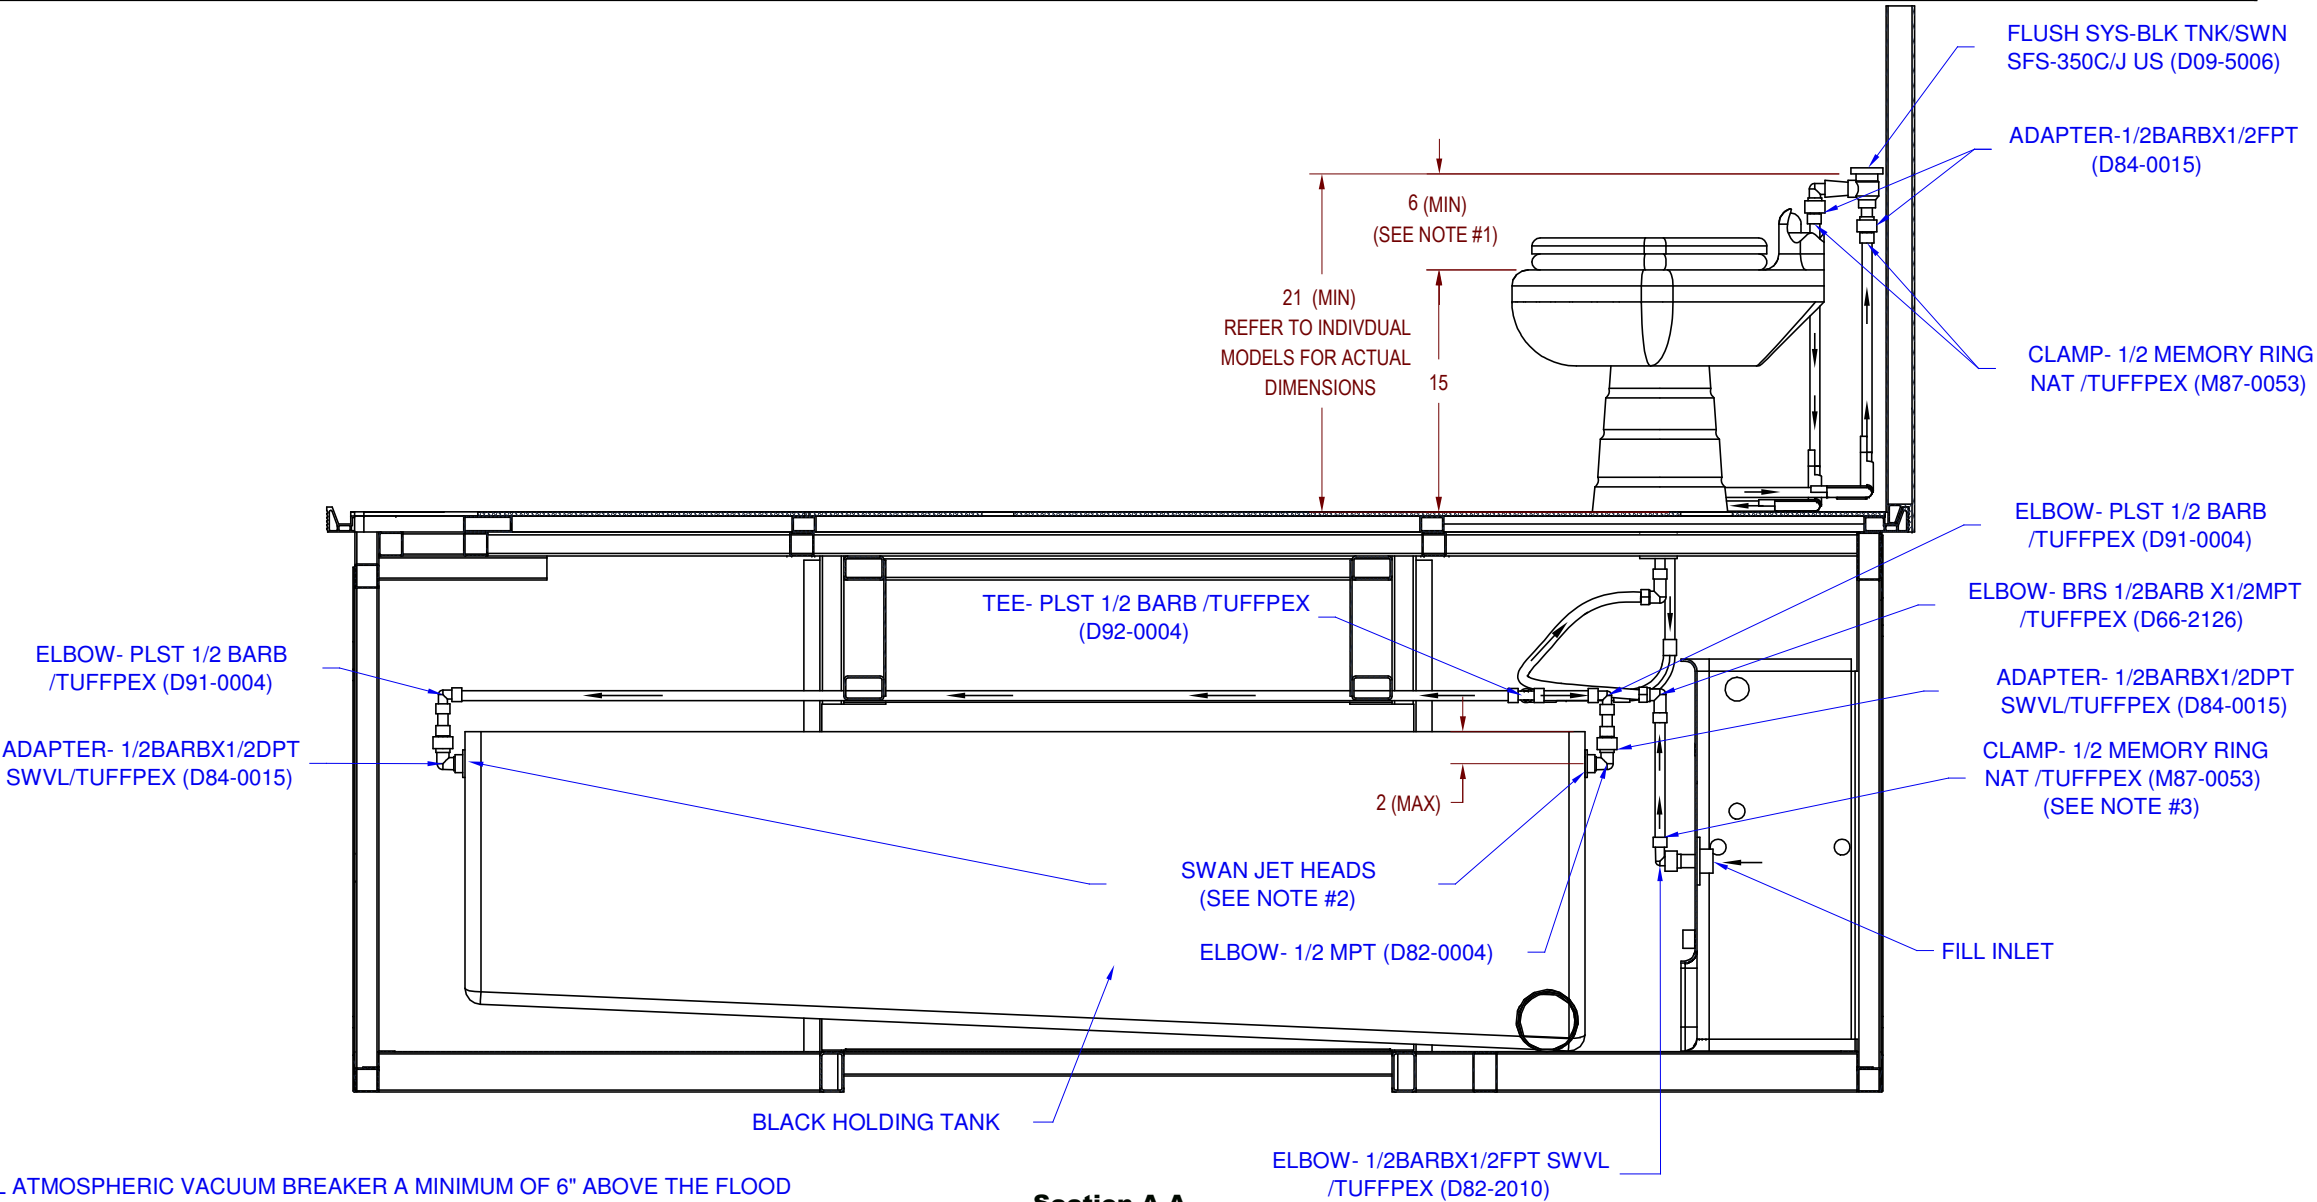

- NOTES:
1. INSTALL ATMOSPHERIC VACUUM BREAKER A MINIMUM OF 6" ABOVE THE FLOOD RIM OF THE HIGHEST FIXTURE CONNECTED TO THE BLACK WASTE TANK.
 2. LOCATE JET HEADS NOT MORE THAN 2" FROM TOP OF TANK.
 3. USE CLAMP- 1/2 MEMORYRING NAT /TUFFPEX (M87-0053) AT ALL CONNECTIONS INCLUDING SERVICE COMPARTMENT.

Section A-A